VISCA DOORS



VD-
STEEL FIRE RATED DOORS

STEEL FIRE RATED DOORS

VD-Hinged Steel Fire Rated Doors (Internal)

Specification: -

Doors are fire-rated between 30 and 240 minutes to BS EN 1634-1 for internal use only and smoke-rated to BS EN 1634-3. The single personnel door-sets are designed to enable internal entry and exit. Each is built to order, individually constructed with a choice of hardware, frame, threshold and panel options.



Door frames are manufactured form high tensile 1.5mm thick steel and come complete with adjustable side expanders. A self adhesive teardrop seal is fitted to frame legs and head. Frames are available in various depths to suit the opening.



The door leaf is 44mm thick, manufactured from 1.2mm thick steel sheets and constructed with an integral astragal for added security. The sheets are mechanically interlocked and internally bonded to give a high degree of stability. The standard infill is a “Hexatex” core.



Door ironmongery

Grade 13 stainless steel, twin bearing template drilled butt hinges with integral high security dog bolts are fitted as standard with CE marking. Other hardware available.

Finish

Supplied inclusive of a powder-coated finish in a standard colour. Full range of RAL and BS colours available.


Options & Upgrades

Vision Panels up to 254mm x 1524mm

Louvre Panels up to 610mm x 610mm

Variety of solid and glazed side & over panels.



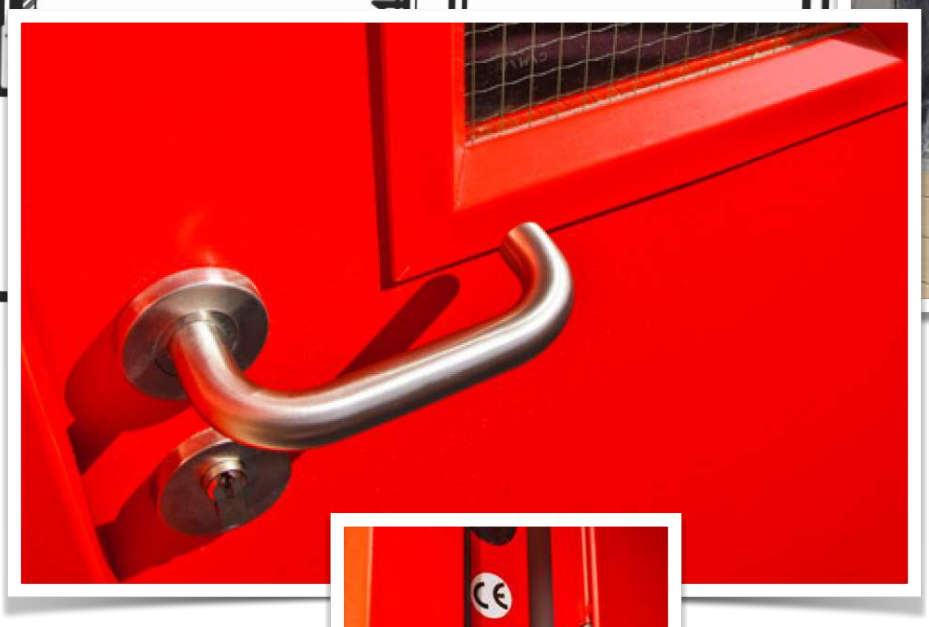





Inserted into the steel door leaf, vision panels satisfy the circulation across routes requirement of Part M of the building regulations.

Produced in various panel formats and sizes, which are fire rated, there is also a choice of glazing options depending on the doors application.



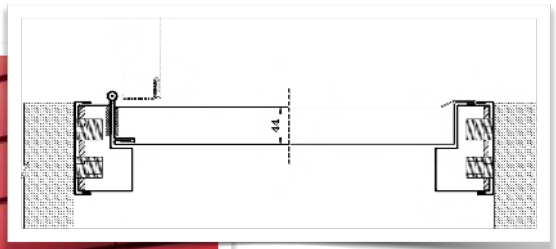

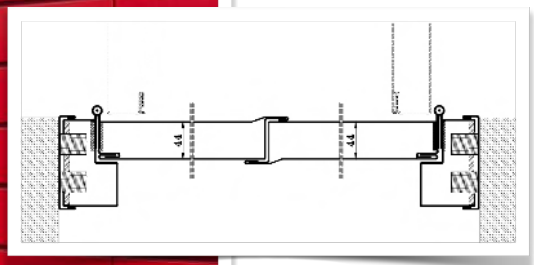





For more information, contact us:-

3J Barlow Way, London, Rainham RM13 8BT, UK

020 7183 4166 info@viscadoors.co.uk www.viscadoors.co.uk