VISCA DOORS



VD-IND

INDUSTRIAL ROLLER SHUTTER

VD-IND Electrically Operated Roller Shutter Door

Specification: -

The Door is designed & tested in accordance with:

BS EN 12604:2017+A1:2020
BS EN 12453:2017+A1:2021




Vertical mild steel angles and/or box sections are supplied to support the entire door. These are bolted to the door aperture and suitably sized mild steel endplates are fitted to the top of each vertical support, to support the roller barrel assembly. This assembly will be securely fixed to each endplate to ensure retention during normal operation.

The shutter curtain is constructed from suitable interlocking galvanised steel laths and a galvanised "T" section bottom rail. The shutter curtain runs in galvanised steel side channels, mounted to the vertical angle/box. The depth and type of the channel will be dependent on the door size.

All mild steel components are finished in one coat of primer. Polyester Powder finish (to BS3900 F2 & F7) is available on request to any standard colour within the BS 4800 or RAL range (Colour subject to availability at time of order & extra costs will apply).



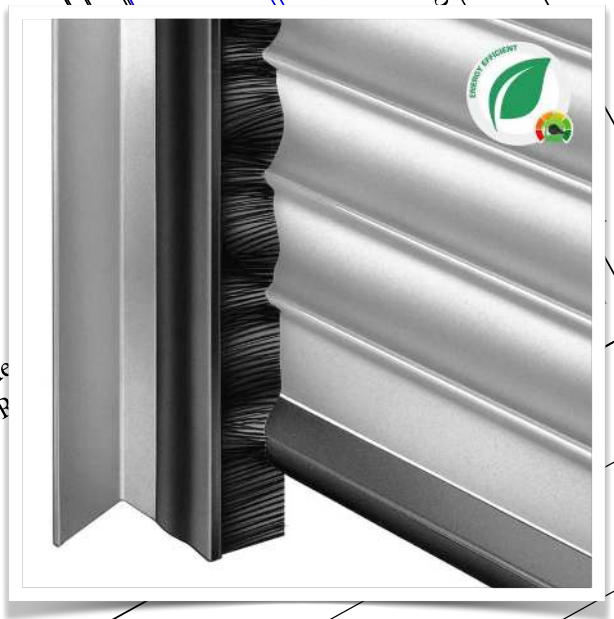

Additional items such as coil casings, bottom seals, head seals, radio control, can be provided on request.









Electrical Specification: -

Electrical operation is provided using a high-quality motor and gearbox with digital travel limits. This drive system has an anti-fallback safety device incorporated internally.


A control panel will be provided at low level and will have open, close and emergency stop buttons as standard, along with self-diagnostics and service reminder. Emergency manual over-ride is provided as standard to allow operation of the door in case of power failure.



Additional safety devices will be supplied to meet BS EN 12453:2017+A1:2021 if required, ensuring the door if fully compliant with the very latest safety standards.





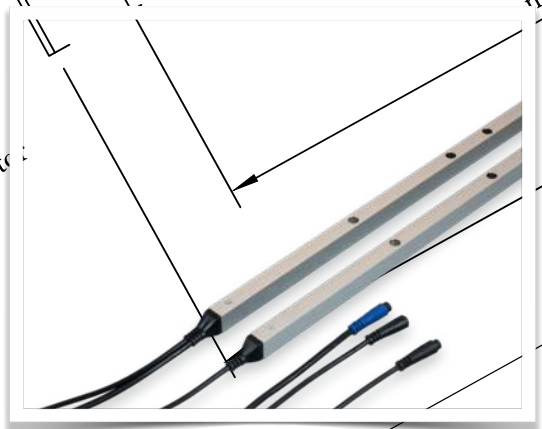

Documentation:-

Each door is provided with:-

Technical Drawing (issued for approval)
Declaration of Conformity
Declaration of Performance
Operating and Maintenance Instructions
Log Book
UKCA labelling

Each door will be installed by fully qualified Industrial Door Technicians and tested in accordance with:

- BS EN 13241



A full 24/7 comprehensive back up is provided 365 days a year to keep your door in full working order.





For more information, contact us:-

3J Barlow Way, London, Rainham RM13 8BT, UK

020 7183 4166 info@viscadoors.co.uk www.viscadoors.co.uk