
VISCA DOORS

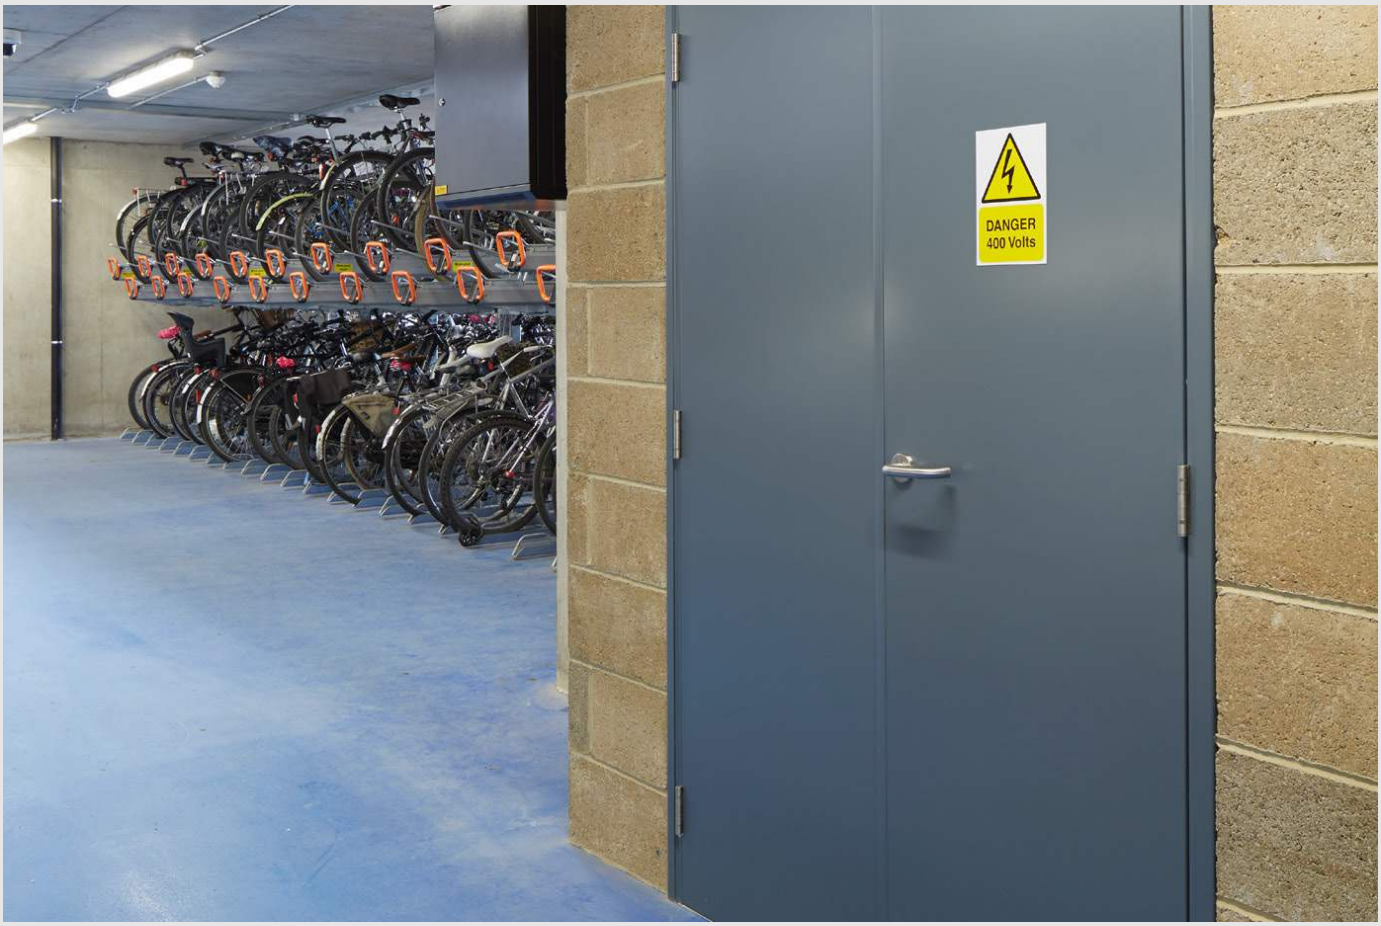


VD-
SECURITY RATED
STEEL HINGED DOORS

SECURITY RATED HINGED DOORS

VD-Hinged Security Rated Doors

Specification: -

Our Security Rated Doors offer various levels of protection against attack, and certified to LPS-1175 security standard.

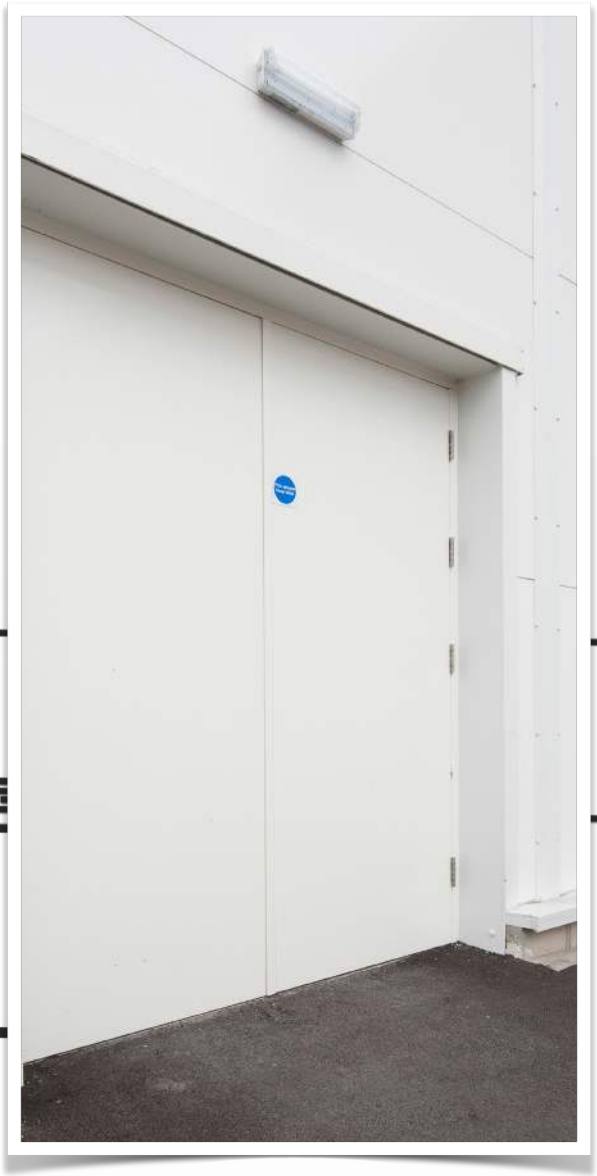


The SR1security door comprises of single and double leaves that are specifically designed for use in locations that would benefit from enhanced protection. The typical applications for this range includes leisure facilities, schools and universities, housing association communal areas and general retail outlets.

Please note that these door-sets can only be supplied with outward opening leaves.

The door leaf is manufactured from 1.5mm galvanised attack face steel with 1.5mm inner face, the composite door leaf is 45mm thick with astragal lip to the closing edge. It weighs approximately 40kg per square metre.

The welded frame is made from reinforced 1.5mm galvanised steel and a 38mm x 100mm single rebated profile. It is reinforced at the hinges, lock keeps and fixing points.

The door is fitted with a double hinge to top of door for additional strength. It also incorporates an anti leverage cover strip to closing edge of door leaf. The door-sets are also Secured by Design approved and are also available with solid over panels and hinged over panels which can be fixed, or removable.

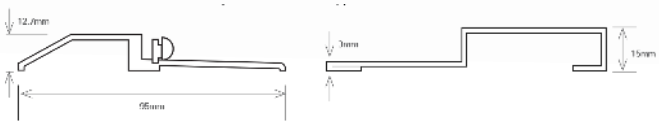

Aluminium and Steel threshold

Door ironmongery

Choice of Exidor 301 Panic Actuator, Exidor 294A SD Panic Bolt available, an optional extra outside access device. Nemef Triple lockset, Zero Sashlock, Zero Nightlatch, IDC security Escutcheon. Flush Bolts or 12” Monkey Bolts to passive leaf. Keys and cylinders can be registered to eliminate the chance of key copying.



The SR2 security door comprises of single and double leaves that are specifically designed for use in locations that would benefit from enhanced protection. The typical applications for this range includes leisure facilities, schools and universities, housing association communal areas and general retail outlets.
Please note that these door-sets can only be supplied with outward opening leaves.

The door leaf is manufactured from 1.5mm galvanised attack face steel with 1.5mm inner face, the composite door leaf is 45mm thick with astragal lip to the closing edge. It weighs approximately 40kg per square metre.

The welded frame is made from reinforced 1.5mm galvanised steel and a 38mm x 100mm single rebated profile. It is reinforced at the hinges, lock keeps and fixing points.

The door is fitted with double hinges for additional strength. It also incorporates an anti leverage cover strip to closing edge of door leaf. The door-sets are also Secured by Design approved and are also available with solid over panels and hinged over panels which can be fixed, or removable.

Door ironmongery


Choice of Assa Sashlock, Assa Deadlock, or Exidor 700 series panic hardware available an optional Exidor outside access device. Also available with Surelock McGill Sterling's Heavy Duty Tower bolts on the passive leaf.

Keys and cylinders can be registered to eliminate the chance of key copying.

LPS1175: Issue 7
Certificate no: 931

Secured by Design
Official Police Security Initiative

Aluminium and Steel threshold

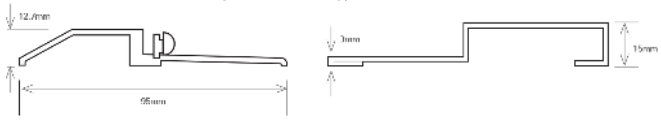




The SR3 security door comprises of single and double security-rated steel leaves that are specifically designed for use in locations that would benefit from enhanced protection. The typical applications for this range includes retail outlets, cash rooms, warehouses and utility sub stations.

Please note that these door-sets can only be supplied with outward opening.

The door leaf is manufactured from 1.5mm galvanised attack face steel with 1.5mm inner face, the composite door leaf is 51mm thick with astragal lip to the closing edge. It weighs approximately 80kg per square metre.

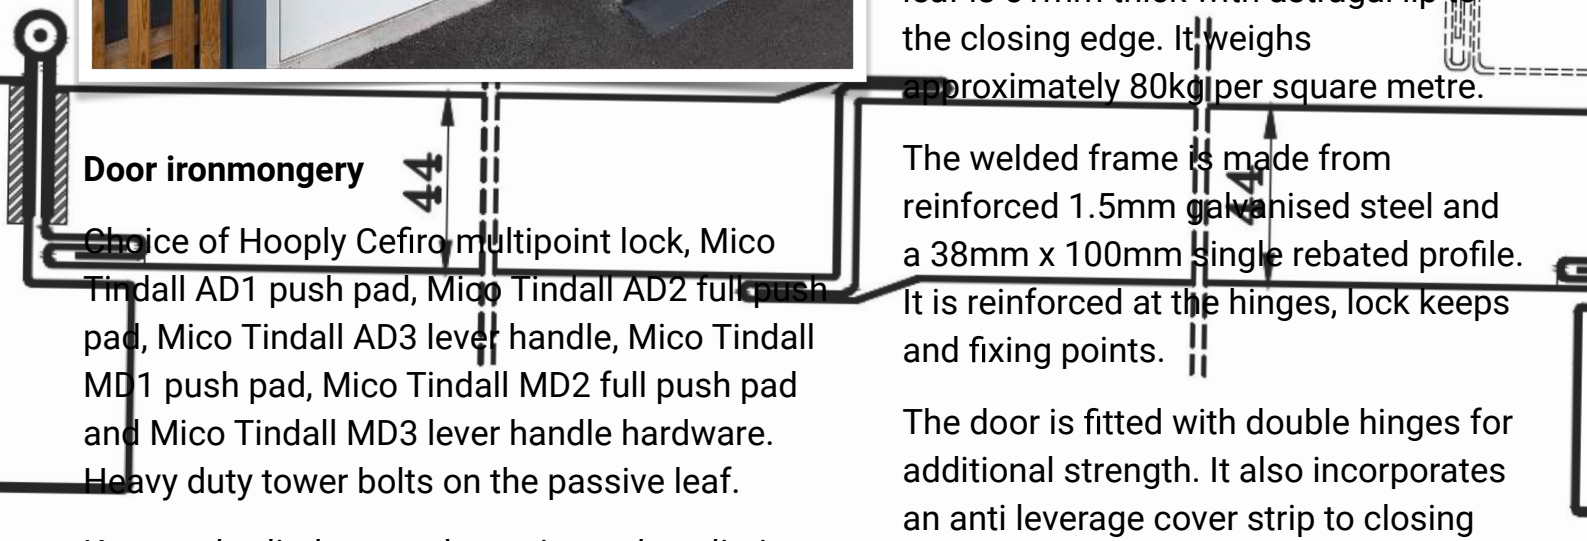

Door ironmongery

Choice of Hooply Cefiro multipoint lock, Mico Tindall AD1 push pad, Mico Tindall AD2 full push pad, Mico Tindall AD3 lever handle, Mico Tindall MD1 push pad, Mico Tindall MD2 full push pad and Mico Tindall MD3 lever handle hardware. Heavy duty tower bolts on the passive leaf.

Keys and cylinders can be registered to eliminate the chance of key copying.


The welded frame is made from reinforced 1.5mm galvanised steel and a 38mm x 100mm single rebated profile. It is reinforced at the hinges, lock keeps and fixing points.

The door is fitted with double hinges for additional strength. It also incorporates an anti leverage cover strip to closing edge of door leaf. The door-sets are also Secured by Design approved and are also available with solid over panels and hinged over panels which can be fixed, or removable.


Steel threshold

LPS1175: Issue 7
Certificate no: 931

Secured by Design
Official Police Security Initiative

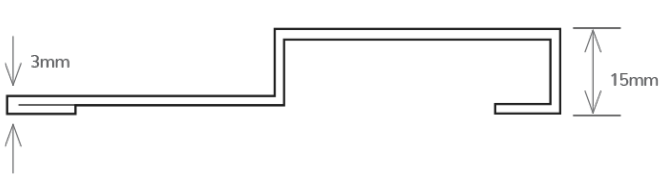

The SR4 security door is accredited to offer a high level of security against potential attacks from heavy duty tools such as felling axes and disc grinders. These single and double door sets are available in a wide range of bespoke sizes, with over 100 locking options and a choice of RAL/ BS colours. The range is suited for use in high-security installations, such as the Ministry of Defence, banks, schools, utility buildings, sub-stations and Home Office approved gun rooms.

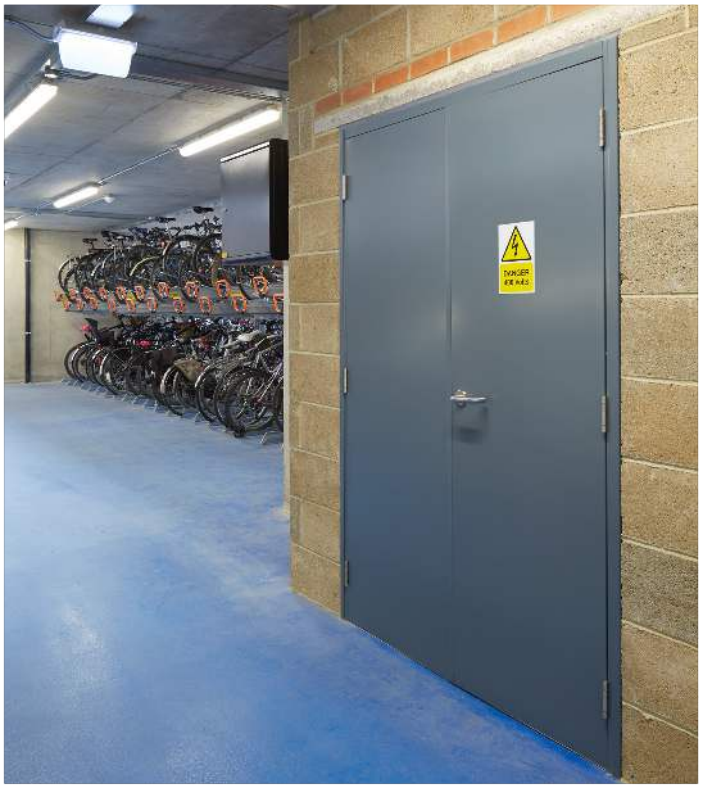

LPS1175: Issue 7
Certificate no: 931

Secured by Design


Official Police Security Initiative

The door leaf is manufactured from 1.5mm steel on the inner and outer face, the composite door leaf is 45mm thick with an integral astragal lip to the closing edge. It weighs approximately 80kg per square metre.

The welded frame is made from reinforced 1.5mm steel and a 38mm x 100mm single rebated profile, reinforced at the hinges, lock keeps and fixing points.

The range is certified to LPS1175 SR4, and fitted with extreme heavy duty hinges complete with 2 integral dog bolts per hinge. Constructed to resist attack from high powered cordless tools, felling axes, disk grinders, jigsaws etc.

Standard threshold

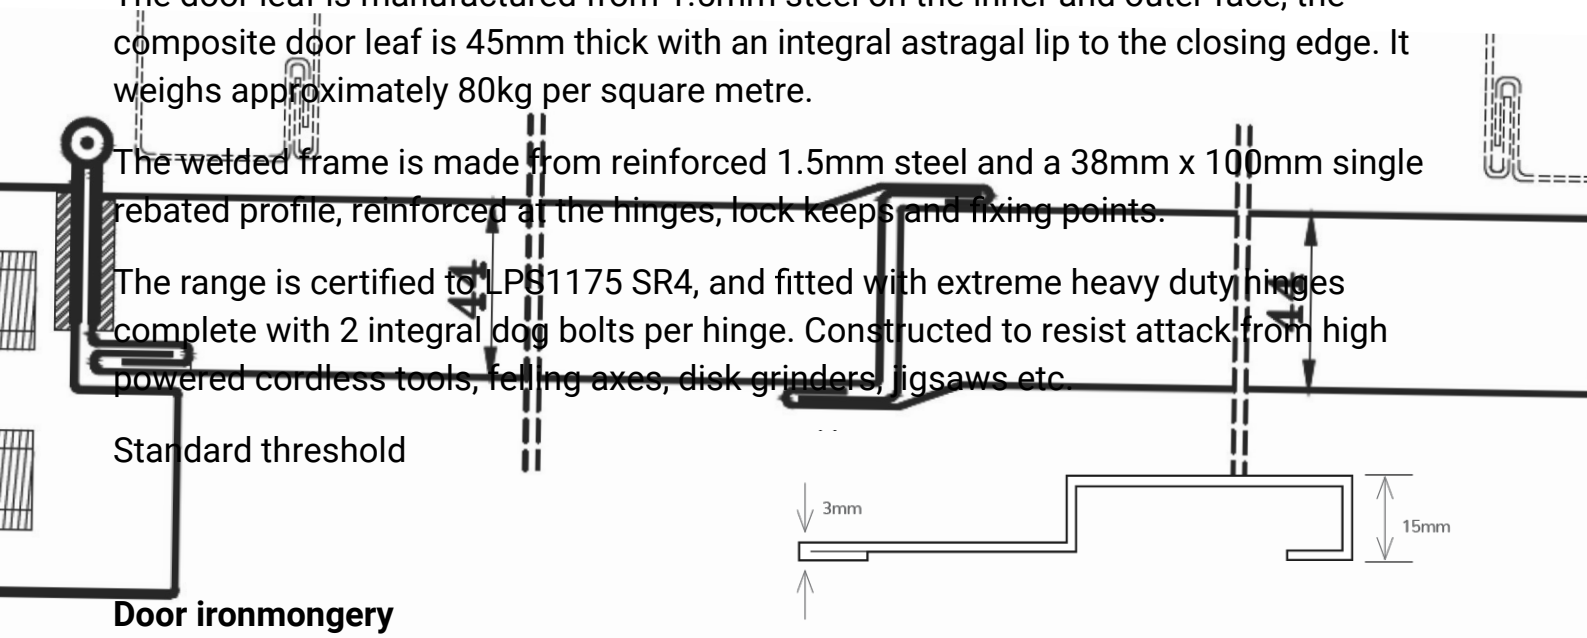

Door ironmongery

Choice of personnel, panic and escape hardware, with over 100 locking options available - including single and multi-point bolting. All escape hardware complies with BS EN 179. A full list of compliant hardware can be found at www.redbooklive.com

For more information, contact us:-

3J Barlow Way, London, Rainham RM13 8BT, UK

020 7183 4166 info@viscadoors.co.uk www.viscadoors.co.uk